


## 小型气液增压泵

JS 系列气液增压泵是单头型液体增压泵，属于小型增压泵，性价比高。驱动缸筒直径 100mm，泵身体积小，重量轻，结构简单易维护。最大可输出 100MPa 的液体压力，适用于多种介质，广泛应用于各元件的静压测试，如高压软管的测试、阀门接头测试、液压工具测试及各种设备的试压等。产品质保期为一年。




JS04/JS06

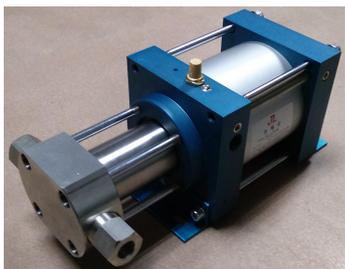


JS10/JS16/JS25/JS45




JS64/JS100/JS130

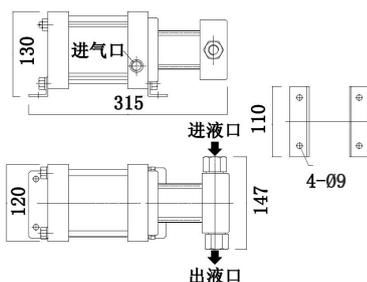

JS04-JS06 外形尺寸

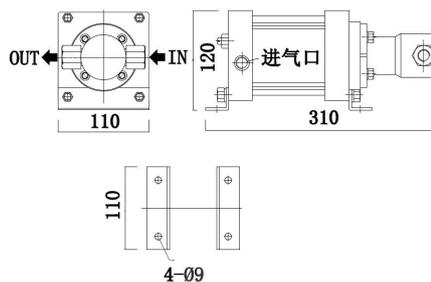

JS10-JS45 外形尺寸

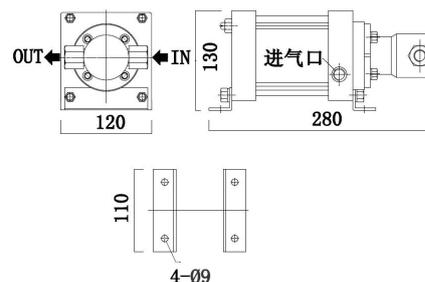

JS64-JS130 外形尺寸

型号	增压比	最大输出压力(bar) (驱动压力 7bar)	每冲程排量 (ML)	接口螺纹		
				进气口	进液口	出液口
JS04	4: 1	28	117.7	PT3/8"	PT3/8"	PT3/8"
JS06	6: 1	42	75.3	PT3/8"	PT3/8"	PT3/8"
JS10	10: 1	70	42.4	PT3/8"	PT3/8"	PT3/8"
JS16	16: 1	112	29.4	PT3/8"	PT3/8"	PT3/8"
JS25	25: 1	175	15.2	PT3/8"	PT3/8"	PT3/8"
JS45	45: 1	315	12	PT3/8"	PT3/8"	PT3/8"
JS64	64: 1	448	6.2	PT3/8"	PT3/8"	PT3/8"
JS100	100: 1	700	4.3	PT3/8"	PT3/8"	PT3/8"
JS130	130: 1	910	3.5	PT3/8"	PT3/8"	PT3/8"

基于驱动气压 7Bar 时，耗气量 0.7M<sup>3</sup>/min。